

# DEUTSCHER

ELECTRIC 



## Wide Batten LZN-CRYSTAL-LED

Wide Batten LZN-CRYSTAL-LED DL-151-12064

### Product data

#### General information

Light source color	840 neutral white
Optical cover/lens type	Polycarbonate linear
Control interface	-
Protection class IEC	Safety class II
B Light source engine type	LED

Optical cover/lens material	Prismatic
Optical cover/lens finish	s Opal
Overall length	1200 mm
Overall width	70 mm
Color	White

#### Approval and application

Ingress protection code	IP20 [ Finger-protected]
-------------------------	--------------------------

#### Operating and electrical

Input Voltage	175 to 250
Input Frequency	V 50 or 60
Power Factor (Min)	Hz 0.9

#### Initial performance (IEC compliant)

Initial luminous flux (system flux) Luminous flux tolerance	6500 lm
Initial LED luminaire efficacy	+/-10%
Init. Corr. Color Temperature	12000 lm/W
Init. Color Rendering Index	6400 K
Initial input power	>80
	120 W

#### Controls and dimming

Dimmable	No
----------	----

#### Mechanical and housing

Housing Material	Metal
------------------	-------

# Wide Batten LZN-CRYSTAL-LED DL-151-12064

Power consumption tolerance	+/-10%
-----------------------------	--------

## Application conditions

Ambient temperature range	-20 to +40 °C
---------------------------	---------------

## Product data

Full product code	4870241040396
Order product name	LZN-CRYSTAL-LED DL-151-12064
EAN/UPC - Product	4870241040396

Order code	4870241040396
------------	---------------

Numerator - Quantity Per Pack	1
-------------------------------	---


Numerator - Packs per outer box	20
---------------------------------	----

Material Nr. (12NC)	4870241040396
---------------------	---------------

Net Weight (Piece)	1 0.280 kg
--------------------	------------

## Dimensional drawing

Wide Batten LZN-CRYSTAL-LED DL-151-12064

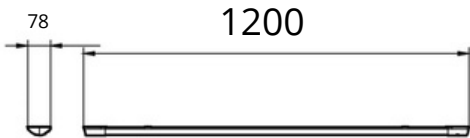

Wide Batten LZN-CRYSTAL-LED DL-151-12064