



KRAFT LED FLOODLIGHTS

KRAFT LED FLOODLIGHTS DLFDS-030-64

This series of spotlights has a thin body, protection against overheating and power surges, high dust and moisture resistance, compliance with EMC (Electromagnetic compatibility) allows you to use these spotlights for almost all lighting tasks both inside and outside the premises.

Product data

General information

Light source color	Cold white
Driver included	No
Optical cover/lens type	Polycarbonate bowl/cover

Operating and electrical

Input Voltage	165 to 265 V
Input Frequency	50 or 60 Hz
Power Factor (Min)	0.95
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	100 lm/W
Init. Corr. Color Temperature	6400 K
Init. Color Rendering Index	>80
Initial input power	30 W
Power consumption tolerance	+/-10%

Mechanical and housing

Housing Material	Aluminum
Optical cover/lens	PP
material Overall length	179 mm
Overall width	220 mm
Overall height	35 mm
Color	Black

Approval and application

Ingress protection code	IP66
-------------------------	------

Initial performance

Initial luminous flux	2400lm
-----------------------	--------

KRAFT LED FLOODLIGHTS

Application conditions

Ambient temperature range -40 to +45 °C

Product data


Full product code 4870241041461

Order product name DLFDS-030-64

Numerator - Quantity Per Pack 1

Numerator - Packs per outer box 6

Dimensional drawing

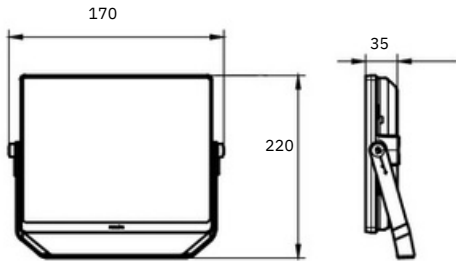

DLFDS-030-64