



ELECTRIC 



KRAFT LED FLOODLIGHTS

KRAFT LED FLOODLIGHTS DLFD-020-64

This series of spotlights has a thin body, protection against overheating and power surges, high dust and moisture resistance, compliance with EMC (Electromagnetic compatibility) allows you to use these spotlights for almost all lighting tasks both inside and outside the premises.

Product data

General information

Light source color	cold white
Driver included	No
Optical cover/lens type	Polycarbonate bowl/cover

Operating and electrical

Input Voltage	165 to 265 V
Input Frequency	50 or 60 Hz
Power Factor (Min)	0.95
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	100 lm/W
Init. Corr. Color Temperature	6400 K
Init. Color Rendering Index	>80
Initial input power	20 W
Power consumption tolerance	+/-10%

Mechanical and housing

Housing Material	Aluminum
Optical cover/lens	PP
material Overall length	190 mm
Overall width	155 mm
Overall height	55 mm
Color	Black

Approval and application

Ingress protection code	IP66
-------------------------	------

Initial performance

Initial luminous flux	1600 lm
-----------------------	---------

KRAFT LED FLOODLIGHTS

Application conditions

Ambient temperature range -40 to +45 °C

Product data


Full product code 4870241040242

Order product name DLFD-020-64

Numerator - Quantity Per Pack 1

Numerator - Packs per outer box 20

Dimensional drawing

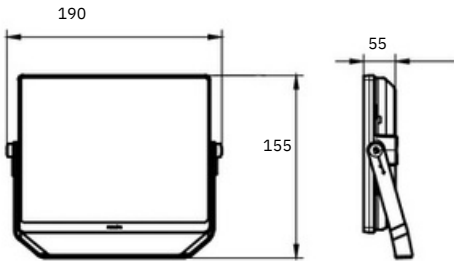

DLFD-020-64