



LEDER LED FLOODLIGHTS

LEADER LED FLOODLIGHTS DLFDW-300-64

The LEADER LED series of luminaires is designed for architectural and functional lighting. The design of the lamp allows you to place it both on the facades of buildings and on industrial sites. A wide range of capacities and optical systems makes this spotlight a universal solution for the most complex outdoor lighting projects.

Product data

General information

Light source color	Cold white
Driver included	No
Optical cover/lens type	Polycarbonate bowl/cover

Operating and electrical

Input Voltage	175 to 265 V
Input Frequency	50 or 60 Hz
Power Factor (Min)	0.95

Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	100 lm/W
Init. Corr. Color Temperature	6400 K
Init. Color Rendering Index	>80
Initial input power	200 W
Power consumption tolerance	+/-10%

Mechanical and housing

Housing Material	Aluminum
Overall length	240 mm
Overall width	338 mm
Overall height	45 mm
Color	Black

Approval and application

Ingress protection code	IP65
-------------------------	------

Initial performance

Initial luminous flux	16200lm
-----------------------	---------

KRAFT LED FLOODLIGHTS

Application conditions

Ambient temperature range -40 to +45 °C

Product data


Full product code 4870241042468

Order product name DLFDW-200-64

Numerator - Quantity Per Pack 1

Numerator - Packs per outer box 5

Dimensional drawing

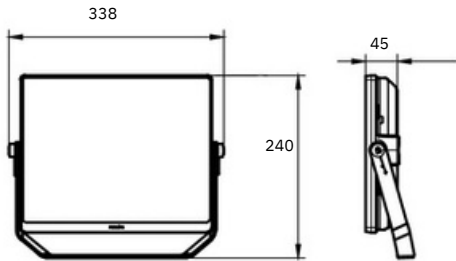

DLFDW-200-64